


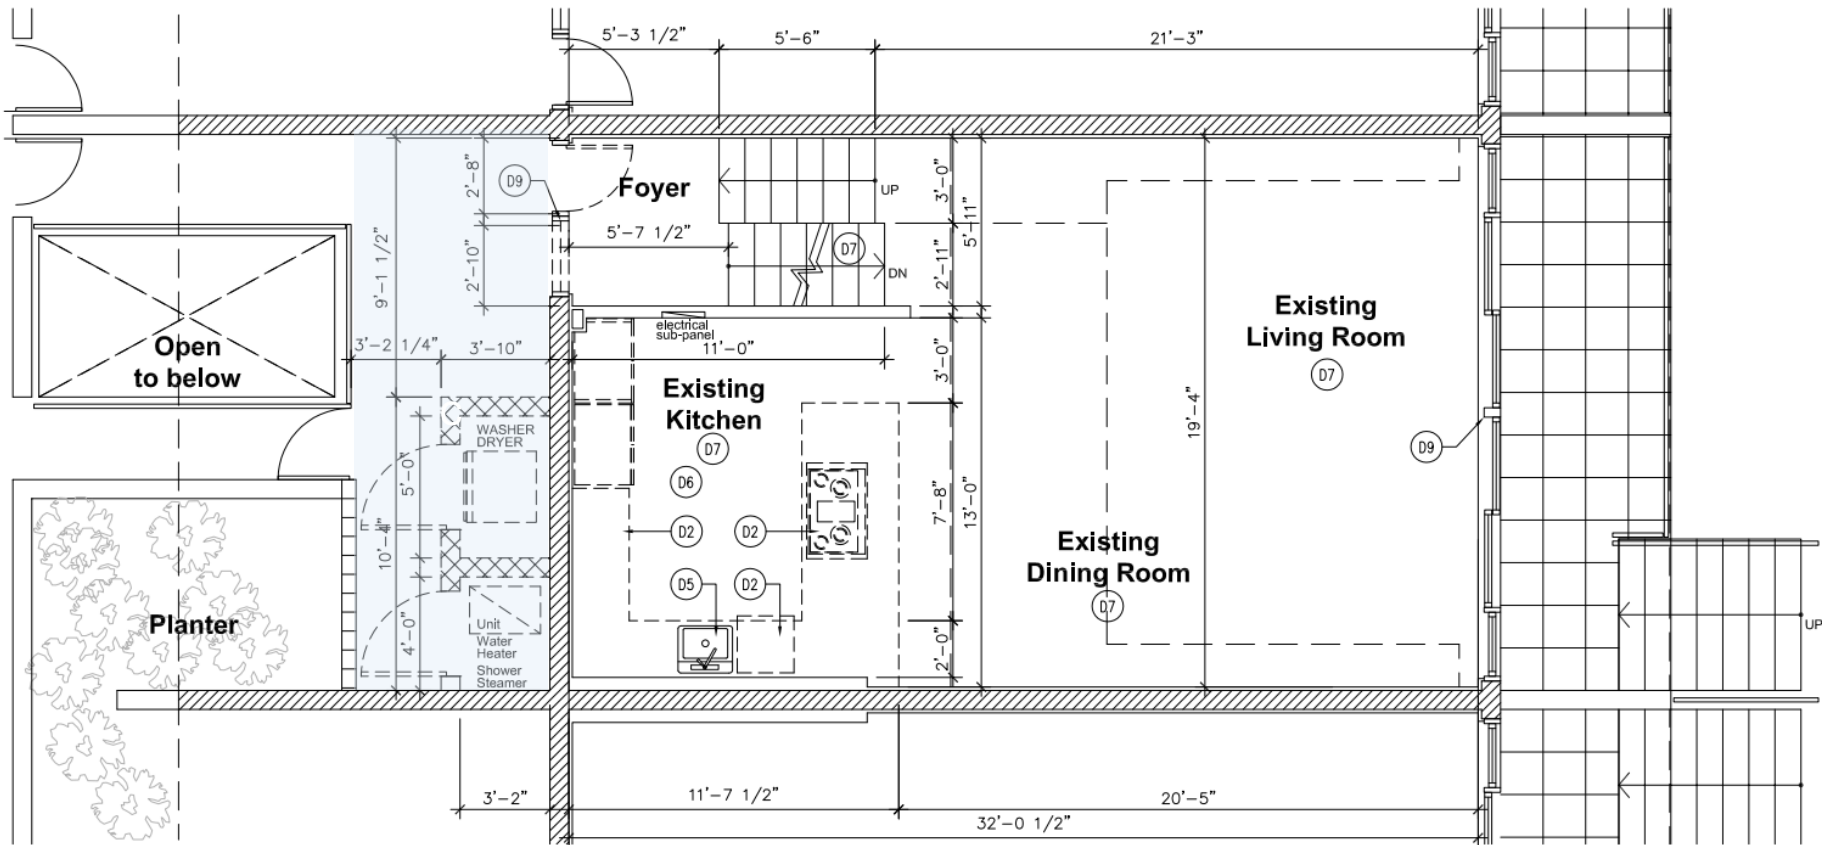

DEMOLITION: 2ND FLOOR PLAN

1/4" = 1'-0"

Wall Legend	
	EXISTING PARTITION, MILLWORK AND PLUMBING FIXTURES TO BE REMOVED.
	EXISTING PARTITIONS TO REMAIN
	EXISTING MASONRY WALL TO REMAIN
	PROPOSED 5" PARTITION WALL.
	PROPOSED AREA UPDATE

G.C. TO CONFIRM WITH ARCHITECT AND OWNER IF WATER DAMAGE OR STRUCTURAL ISSUES ARE DISCOVERED IN THE DEMO PHASE.

DEMOLITION KEY NOTES:	
D1	G.C. REMOVE EXISTING DOORS. PREPARE FOR PROPOSED DOORS. TYPICAL REMOVE & REPLACE.
D2	GC TO REMOVE EXISTING MILLWORK, FIXTURES AND APPLIANCES AT EXISTING KITCHEN. BATHROOMS REMOVE AND REINSTALL.
D3	GC TO REMOVE AND REPLACE EXISTING BASEBOARDS. PATCH AND PAINT AS REQUIRED.
D4	GC TO REMOVE EXISTING PARTITION TO CEILING. PATCH AND PAINT AS REQUIRED.
D5	EXISTING PLUMBING FIXTURES, SUPPLY LINES, SANITARY LINES AND ALL VENT STACKS TO BE RECONNECTED PER PROPOSED SCOPE OF WORK. CAP FLOOR AS REQUIRED.
D6	G.C. REMOVE EXISTING TILE FINISH AND SLAB AS NECESSARY FOR PROPOSED SANITARY LINE. REFER
D7	G.C. REMOVE EXISTING TILE FINISH AND PREPARE SUB-BASE FOR NEW TILE INSTALLATION.
D8	GC TO PROTECT EXISTING INTERIOR DOORS, HARDWARE, ACCESSORIES AND ADJACENT COMPONENTS AND PREPARE FOR PROPOSED DOORS. REMOVE AND REPLACE CASING.
D9	EXISTING STOREFRONT TO BE REMOVED AND REPLACED UNDER SEPARATE PERMIT
D10	NOT USED
D11	NOT USED

